TYPE 02 Fixed Insertion — Direct Mounting

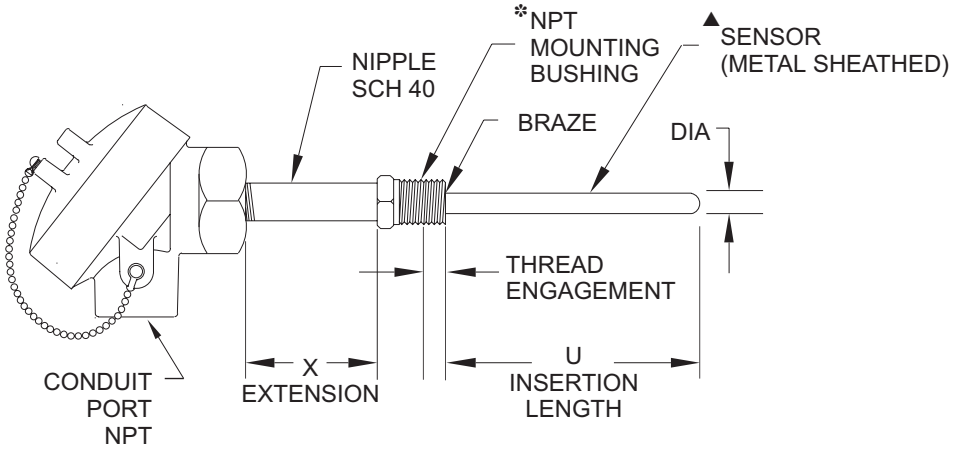

▲ M_gO insulated for thermocouple, AL_2O_3 insulated for R.T.D.
✻ Flange may be substituted — Specify: size, rating, type and material.

	HEAD		MOUNTING BUSHING		EXTENSION		SENSOR				
LINE #	MAT'L	CONDUIT PORT	MAT'L	SIZE	MAT'L	DIM X	DIA.	TYPE	# OF WIRES	SHEATH MAT'L	MEASURING JUNCTION
1	C.I.	3/4	304 SS	1/2	C.S.	2	3/16	J		316 SS	GROUNDED
2	ALUM.	1/2	OTHER ADVISE	3/4	304 SS	3	1/4	K	2	INC.	UNGROUNDED
3				1	OTHER ADVISE	4	5/16	E	3	OTHER ADVISE	EXPOSED
4						OTHER ADVISE		T	4		OTHER ADVISE
5								100 OHM PLAT.			NOT APPLICABLE
6								OTHER ADVISE	6		

P/N 02 —											

Complete using the line number for each column in sequence from left to right, and Specify: Dimension "U."

TEMP-PRO Inc. • 200 Industrial Drive • Northampton, MA 01060
Telephone: (413) 584-3165 • Toll Free: (800) 991-9093 • Fax: (413) 586-3625
E-Mail: sales@temp-pro.com • Web Site: www.temp-pro.com