


### TYPE 05 Standard Industrial

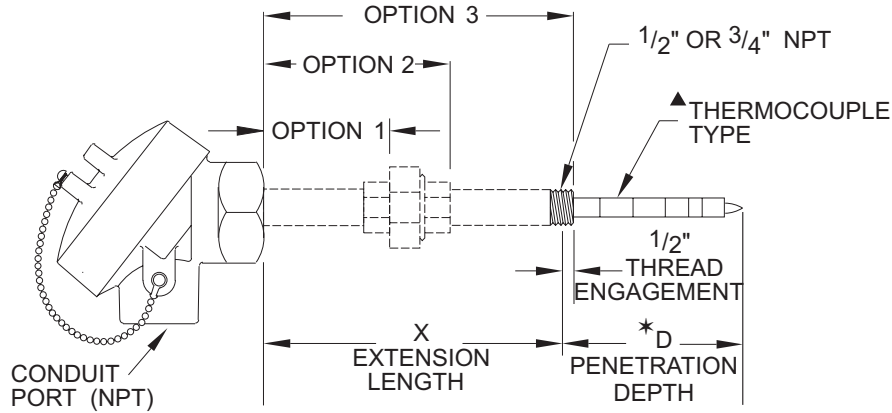

- ★ Must specify "D" dimension if thermowell or pipewell is not required. For thermowell (female threaded protection tube), D=bore depth plus 3/16". For pipewell (male threaded protection tube), D=bore depth minus 5/16".
- ▲ For thermocouple selection: see page 17.

LINE #	HEAD		EXTENSION				THERMOCOUPLE				
	MAT'L	CONDUIT PORT	OPTION	MAT'L	PIPE WT.	DIM X	CALIB.	▲ TYPE	GAUGE SIZE	# OF ELEMENTS	MEASURING JUNCTION
1	C.I.	3/4	1	C.S.	S 40	6	J	171	8	1	EXPOSED
2	ALUM.	1/2	2	S.S.	S 80	4	K	172	14	2	UNGROUNDING
3	BLOCK ONLY	NOT REQ'D	3	ALUM.	NOT REQ'D	3	E	173	16		EXPOSED TWIST WELD
4	NOT REQ'D		NOT REQ'D	P.V.C.		OTHER ADVISE	T	174	20		
5	OTHER ADVISE			GALV C.S.		NOT REQ'D	OTHER ADVISE	175			
6				OTHER ADVISE				176			
7				NOT REQ'D				177			

P/N 05 —

Complete using the line number for each column in sequence from left to right.

