
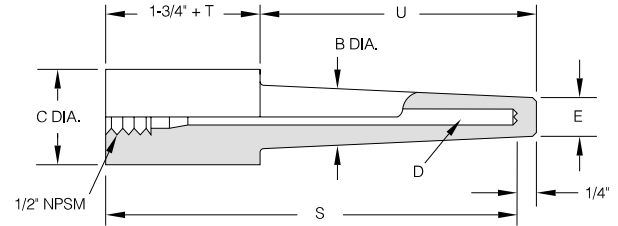


Socket-Weld, Tapered Shank, 3/4" & 1" Pipe Sizes, 1/4" & 3/8" Nominal Bore

STANDARD

WITH LAGGING EXTENSION

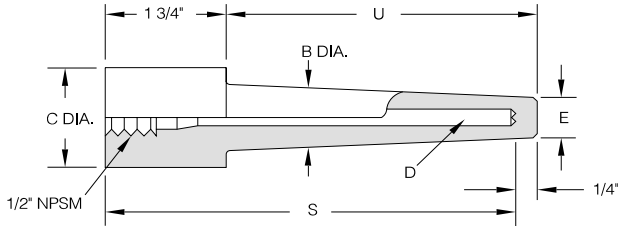

GENERAL INFORMATION			PART #	PART #
S	U	P	.260 BORE	.385 BORE
4"	2-1/2"	3/4	75 W 0250 HS 260	75 W 0250 HS 385
		1	10 W 0250 HS 260	10 W 0250 HS 385
6"	4-1/2"	3/4	75 W 0450 HS 260	75 W 0450 HS 385
		1	10 W 0450 HS 260	10 W 0450 HS 385
9"	7-1/2"	3/4	75 W 0750 HS 260	75 W 0750 HS 385
		1	10 W 0750 HS 260	10 W 0750 HS 385
12"	10-1/2"	3/4	75 W 1050 HS 260	75 W 1050 HS 385
		1	10 W 1050 HS 260	10 W 1050 HS 385
15"	13-1/2"	3/4	75 W 1350 HS 260	75 W 1350 HS 385
		1	10 W 1350 HS 260	10 W 1350 HS 385
18"	16-1/2"	3/4	75 W 1650 HS 260	75 W 1650 HS 385
		1	10 W 1650 HS 260	10 W 1650 HS 385
24"	22-1/2"	3/4	75 W 2250 HS 260	75 W 2250 HS 385
		1	10 W 2250 HS 260	10 W 2250 HS 385

GENERAL INFORMATION				PART #	PART #
T	S	U	P	.260 BORE	.385 BORE
2"	6"	2-1/2"	3/4	75 W 0250 LHS 260	75 W 0250 LHS 385
			1	10 W 0250 LHS 260	10 W 0250 LHS 385
3"	9"	4-1/2"	3/4	75 W 0450 LHS 260	75 W 0450 LHS 385
			1	10 W 0450 LHS 260	10 W 0450 LHS 385
3"	12"	7-1/2"	3/4	75 W 0750 LHS 260	75 W 0750 LHS 385
			1	10 W 0750 LHS 260	10 W 0750 LHS 385
3"	15"	10-1/2"	3/4	75 W 1050 LHS 260	75 W 1050 LHS 385
			1	10 W 1050 LHS 260	10 W 1050 LHS 385
3"	18"	13-1/2"	3/4	75 W 1350 LHS 260	75 W 1350 LHS 385
			1	10 W 1350 LHS 260	10 W 1350 LHS 385
3"	24"	19-1/2"	3/4	75 W 1950 LHS 260	75 W 1950 LHS 385
			1	10 W 1950 LHS 260	10 W 1950 LHS 385

GENERAL INFORMATION				
P	B	C	BORE DIA. D	E
3/4	25/32	1.05	.260	5/8
			.385	49/64
1	1-1/32	1.315	.260	5/8
			.385	49/64

LEGEND	
U =	Shank length below threads
P =	Process connection NPT
S =	Bore depth = instrument element length including its threads
B =	Max Shank Diameter
H =	Hex size across flats
T =	Lagging Extensions

Specify Material Coding At End Of Part # (See Inside Cover)	
AA	- Brass
B	- Carbon Steel
C	- AISI 304
S	- AISI 316

To order plug and chain add a suffix to the part number.
For brass, add 1. For stainless, add 2.

