




STANDARD RTDs WITH PLATINUM WINDINGS

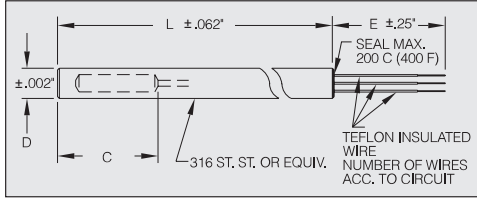


R002

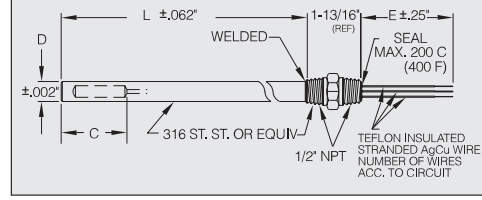


R005

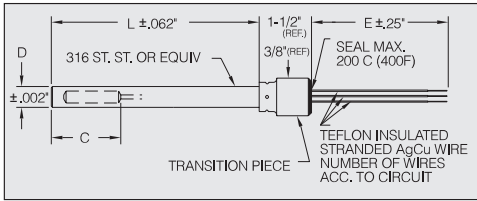

R003

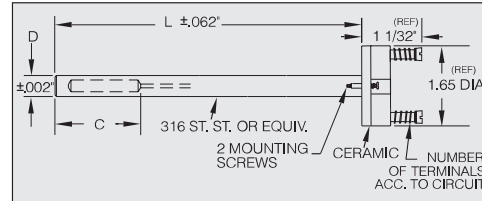

R006

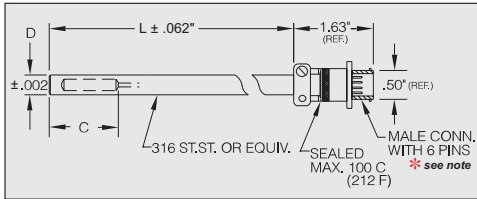

R004
* R018 Mating connector

Temperature Range -250 to 550°C
 -420 to 1020°F
 Diameter (D)25" or .125"
 Winding 100 ± .1Ω @ 0°C, or
 2x100 ± .1Ω @ 0°C
 T.C. = .00385, DIN Class B
 Sensing Length "C" 1" long
 Specify if RTD is to be bendable type.

CIRCUIT	PART NUMBER						To order, specify part #, 'L' & 'E' as applicable.
	R002-101	R003-101	R004-101	R005-101	R006-101	D=0.25"	
	R002-151	R003-151	R004-151	R005-151	R006-151	D=0.125"	
	R002-102	R003-102	R004-102	R005-102	R006-102	D=0.25"	
	R002-152	R003-152	R004-152	R005-152	R006-152	D=0.125"	
	R002-103	R003-103	R004-103	R005-103	R006-103	D=0.25"	
	R002-153	R003-153	R004-153	R005-153	R006-153	D=0.125"	
	R002-105	R003-105	R004-105	R005-105	R006-105	D=0.25"	
	R002-106	R003-106	R004-106	R005-106	R006-106	D=0.25"	

