



Threaded, Straight Shank, 3/8" Nominal Bore

STANDARD

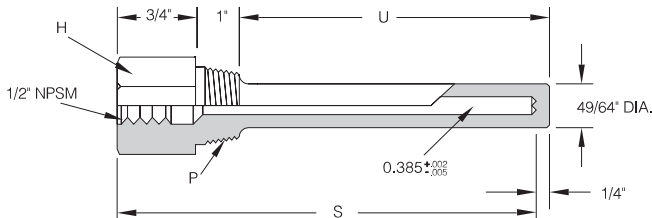

GENERAL INFORMATION				PART #
H	S	U	P	
1-1/8"	4"	2-1/2"	3/4	75 W 0250 ST 385
1-3/8"			1	10 W 0250 ST 385
1-1/8"	6"	4-1/2"	3/4	75 W 0450 ST 385
1-3/8"			1	10 W 0450 ST 385
1-1/8"	9"	7-1/2"	3/4	75 W 0750 ST 385
1-3/8"			1	10 W 0750 ST 385
1-1/8"	12"	10-1/2"	3/4	75 W 1050 ST 385
1-3/8"			1	10 W 1050 ST 385
1-1/8"	15"	13-1/2"	3/4	75 W 1350 ST 385
1-3/8"			1	10 W 1350 ST 385
1-1/8"	18"	16-1/2"	3/4	75 W 1650 ST 385
1-3/8"			1	10 W 1650 ST 385
1-1/8"	24"	22-1/2"	3/4	75 W 2250 ST 385
1-3/8"			1	10 W 2250 ST 385

WITH LAGGING EXTENSION

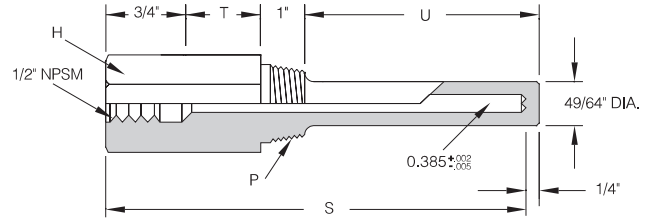

GENERAL INFORMATION					PART #
H	T	S	U	P	
1-1/8"	2"	6"	2-1/2"	3/4	75 W 0250 LST 385
1-3/8"				1	10 W 0250 LST 385
1-1/8"	3"	9"	4-1/2"	3/4	75 W 0450 LST 385
1-3/8"				1	10 W 0450 LST 385
1-1/8"	3"	12"	7-1/2"	3/4	75 W 0750 LST 385
1-3/8"				1	10 W 0750 LST 385
1-1/8"	3"	15"	10-1/2"	3/4	75 W 1050 LST 385
1-3/8"				1	10 W 1050 LST 385
1-1/8"	3"	18"	13-1/2"	3/4	75 W 1350 LST 385
1-3/8"				1	10 W 1350 LST 385
1-1/8"	3"	24"	19-1/2"	3/4	75 W 1950 LST 385
1-3/8"				1	10 W 1950 LST 385

LEGEND

- U = Shank length below threads
- P = Process connection NPT
- S = Bore depth = instrument element length including its threads
- H = Hex size across flats
- T = Lagging Extensions

Specify Material Coding At End Of Part

(See Inside Cover)

- AA - Brass
- B - Carbon Steel
- C - AISI 304
- S - AISI 316

To order plug and chain add a suffix to the part number.
For brass add 1. For stainless add 2.

