



Threaded, Tapered Shank, 3/8" Nominal Bore

STANDARD

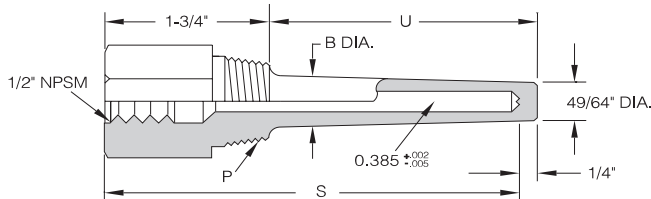

WITH LAGGING EXTENSION

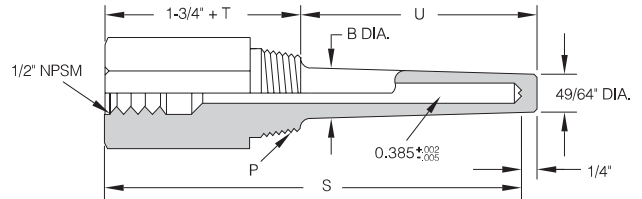

GENERAL INFORMATION					PART #
B	H	S	U	P	
7/8"	1-1/8"	4"	2-1/2"	3/4	75 W 0250 HT 385
1-1/16"	1-3/8"			1	10 W 0250 HT 385
7/8"	1-1/8"	6"	4-1/2"	3/4	75 W 0450 HT 385
1-1/16"	1-3/8"			1	10 W 0450 HT 385
7/8"	1-1/8"	9"	7-1/2"	3/4	75 W 0750 HT 385
1-1/16"	1-3/8"			1	10 W 0750 HT 385
7/8"	1-1/8"	12"	10-1/2"	3/4	75 W 1050 HT 385
1-1/16"	1-3/8"			1	10 W 1050 HT 385
7/8"	1-1/8"	15"	13-1/2"	3/4	75 W 1350 HT 385
1-1/16"	1-3/8"			1	10 W 1350 HT 385
7/8"	1-1/8"	18"	16-1/2"	3/4	75 W 1650 HT 385
1-1/16"	1-3/8"			1	10 W 1650 HT 385
7/8"	1-1/8"	24"	22-1/2"	3/4	75 W 2250 HT 385
1-1/16"	1-3/8"			1	10 W 2250 HT 385

GENERAL INFORMATION						PART #
B	H	T	S	U	P	
7/8"	1-1/8"	2"	6"	2-1/2"	3/4	75 W 0250 LHT 385
1-1/16"	1-3/8"				1	10 W 0250 LHT 385
7/8"	1-1/8"	3"	9"	4-1/2"	3/4	75 W 0450 LHT 385
1-1/16"	1-3/8"				1	10 W 0450 LHT 385
7/8"	1-1/8"	3"	12"	7-1/2"	3/4	75 W 0750 LHT 385
1-1/16"	1-3/8"				1	10 W 0750 LHT 385
7/8"	1-1/8"	3"	15"	10-1/2"	3/4	75 W 1050 LHT 385
1-1/16"	1-3/8"				1	10 W 1050 LHT 385
7/8"	1-1/8"	3"	18"	13-1/2"	3/4	75 W 1350 LHT 385
1-1/16"	1-3/8"				1	10 W 1350 LHT 385
7/8"	1-1/8"	3"	24"	19-1/2"	3/4	75 W 1950 LHT 385
1-1/16"	1-3/8"				1	10 W 1950 LHT 385

LEGEND	
U =	Shank length below threads
P =	Process connection NPT
S =	Bore depth = instrument element length including its threads
B =	Max Shank Diameter
H =	Hex size across flats
T =	Lagging Extensions

Specify Material Coding At End Of Part # (See Inside Cover)	
AA	- Brass
B	- Carbon Steel
C	- AISI 304
S	- AISI 316

To order plug and chain add a suffix to the part number.
For brass, add 1. For stainless, add 2.

