


## TYPE 02 Fixed Insertion — Direct Mounting

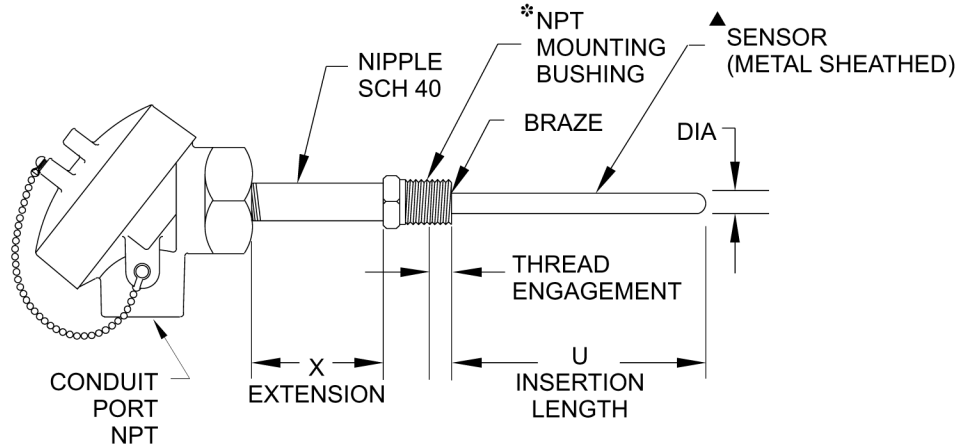

▲ MgO insulated for thermocouple, AL<sub>2</sub>O<sub>3</sub> insulated for R.T.D.  
 \* Flange may be substituted — Specify: size, rating, type and material.

LINE #	HEAD		MOUNTING BUSHING		EXTENSION		SENSOR				
	MAT'L	CONDUIT PORT	MAT'L	SIZE	MAT'L	DIM X	DIA.	TYPE	# OF WIRES	SHEATH MAT'L	MEASURING JUNCTION
1	C.I.	3/4	304 SS	1/2	C.S.	2	3/16	J		316 SS	GROUNDED
2	ALUM.	1/2	OTHER ADVISE	3/4	304 SS	3	1/4	K	2	INC.	UNGROUNDED
3				1	OTHER ADVISE	4	5/16	E	3	OTHER ADVISE	EXPOSED
4						OTHER ADVISE		T	4		OTHER ADVISE
5								100 OHM PLAT.			NOT APPLICABLE
6								OTHER ADVISE	6		

P/N 02 —

Complete using the line number for each column in sequence from left to right, and Specify: Dimension "U."

