


TYPE 03 Oil Tight Removable Sensor

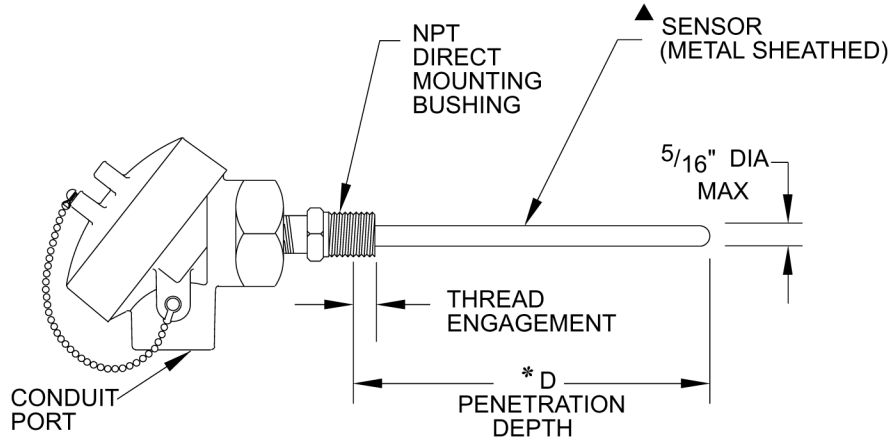

▲ MgO insulation for thermocouple, Al₂O₃ insulation for R.T.D.
 * This dimension to be specified when thermowell is not required.

LINE #	HEAD		MOUNTING BUSHING		SENSOR				
	MAT'L	CONDUIT PORT	MAT'L	PIPE SIZE	DIA.	TYPE	# OF WIRES	SHEATH MAT'L	MEASURING JUNCTION
1	C.I.	3/4	C.S.	1/2	3/16	J		316	GROUNDED
2	ALUM.	1/2	304 SS	3/4	1/4	K	2	INC.	UNGROUNDED
3	BLOCK ONLY	NOT REQ'D	OTHER ADVISE	OTHER ADVISE	5/16	E	3	OTHER ADVISE	EXPOSED
4	NOT REQ'D		NOT REQ'D	NOT REQ'D		T	4		OTHER ADVISE
5						100 OHM PLAT.			NOT APPLICABLE
6						OTHER ADVISE	6		

P/N 03

Complete using the line number for each column in sequence from left to right.

