


## TYPE 07 Sensor with Small Terminal Head

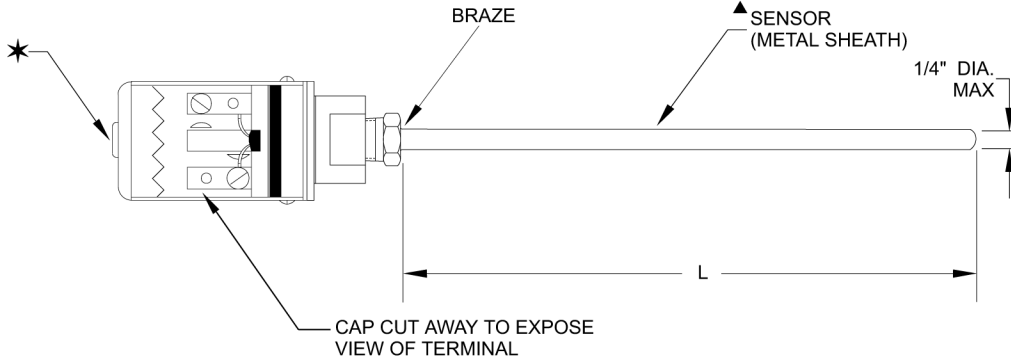

▲ MgO insulated for thermocouple, AL<sub>2</sub>O<sub>3</sub> insulated for RTD.

\* Customer connection — also available is cap with 1/2" NPT female tap (see option 3).

LINE #	SENSOR					OPTIONS
	DIAMETER	TYPE	# OF WIRES	SHEATH MATERIAL	MEASURING JUNCTION	
1	1/4	J		316 SS	GROUNDING	❖ COMPRESSION FITTING
2	3/16	K	2	INC.	UNGROUNDING	◆ BUSHING DRILLED AND WELDED IN PLACE
3	SMALLER ADVISE	E	3	OTHER ADVISE	EXPOSED	1/2 NPT TAPPED CAP
4		T	4		OTHER ADVISE	OTHER ADVISE
5		100 OHM PLAT.			NOT APPLICABLE	
6		OTHER ADVISE	6			

P/N 07 — 

□	□	□	□	□	□
---	---	---	---	---	---

Complete using the line number for each column in sequence from left to right. Specify: Dimension "L"

- ❖ Specify: Material, NPT and type ferrule (Teflon for readjustment, metal for fixed position) - see pg. 22
- ◆ Specify: Material, NPT and location

