



TYPE 13 -165 to 250°C RTD

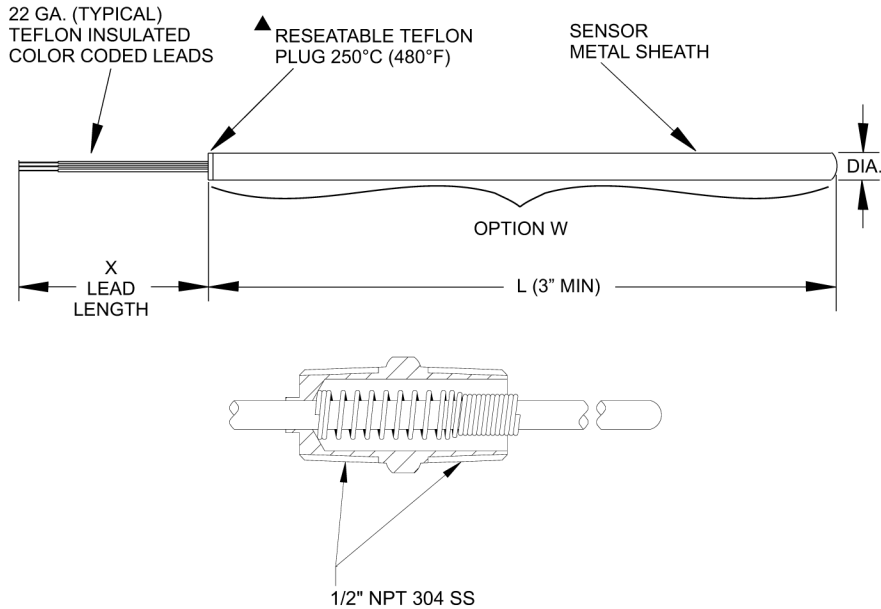

Option W
 Spring Loading
 — Supplied in kit form —
 (assembly by customer)

▲ Sheathed "L" length can be reduced with tubing cutter

SENSOR					
LINE #	DIA.	TYPE	NO. OF LEADS	SHEATH MAT'L	OPTIONS
1	1/4	100 Ω Plat	6	316 SS	COMPRESSION FITTINGS (see pg. 22)
2	3/16	OTHER ADVISE	2	OTHER ADVISE	
3			3		W
4			4		



Complete using line no. for each column in sequence from left to right. Specify: Dimension "L" and "X".

